


SELF PRIMING RE-GENERATIVE PUMPS

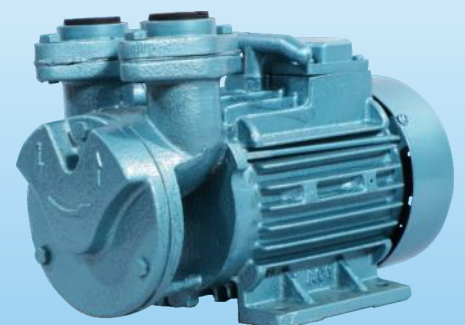

Always step ahead with expertise

Specification	Range
Power Rating	0.5 HP to 1.5 HP
	0.37 KW to 1.10 KW
Speed	2880 / 1440 RPM
Maximum suction lift	Upto 8 Meters
Phase available	Single / Three
Insulation Type	B
Ambient Temperature	40° Max
Frame	Aluminium / Cast Iron

Salient Features

- High quality extruded aluminium / cast iron motor body.
- Double sealed precision ball bearings
- Motor starter made of Low watt loss silicon lamilations and copper winding.
- Gun Metal impeller
- TEFC Motor for better safety. Capacitor start and run type
- Fitted with thermal overhead proector.
- CED Coated castings for selected models

SELF PRIMING RE-GENERATIVE PUMPS

S No.	Model	HP	Pipe size IN MM		TOTAL HEAD IN METRES										
					6	12	18	24	30	36	42	48	54	60	66
1	ECO MINI	0.50	25 x 25	Q - Discharge in LPM	35	27	24	16	6						
2	ECO MAX	1.00	25 x 25		46	41	35	30	24	18	12				
3	SP65	0.50	25 x 25		45	35	30	24	15	6					
4	SP80	1.00	25 x 25		65	56	50	45	40	36	30	24	20	15	
5	SP150	1.50	25 x 25		72	65	58	52	46	42	35	28	24	18	10
6	V-FLOW 50	0.50	25 x 25		40	35	26	21	15	6					
7	V-FLOW 100	1.00	25 x 25		60	52	45	36	27	17	12	6			
8	SWJ100	1.00	25 x 25		54	52	48	42	31	18	8				



SELF PRIMING - SLOW SPEED MONOBLOC - DMS

S No.	Model	HP	Pipe size IN MM		TOTAL HEAD IN METRES												
					9	12	15	18	21	24	27	30	33	36	39	42	48
1	DMS - 2E	0.50	25 x 25	Q - Discharge in LPM	50	40	35	30	23	13	6						
2	DMS - 2	0.50	25 x 25		58	54	53	52	51	48	46	42	36	31	26	18	8
3	DMS - 3E	1.00	25 x 25		66	60	56	51	46	43	37	33	27	23	16	8	
4	DMS - 3	1.00	25 x 25		66	60	58	54	51	47	44	38	33	30	24	18	13

Paive Pumps

S.F. No.418/2A, Opp. Gurusamy Nagar
 Thanneerpandal, Peelamedu
 Coimbatore - 641 004, INDIA
 Phone : **81445 11699, 94422 14800**
 website : www.paivepumps.com

